



宁波锦拓汽配有限公司
NINGBO JET AUTOPARTS CO.LTD

企业数字化
— 让数据替设备发声

ENTERPRISE DIGITALIZATION
— LET DATA SPEAK FOR DEVICES

宁波锦拓汽配有限公司

NINGBO JET AUTOPARTS CO.LTD

地址:浙江省慈溪市掌起镇329国道北首掌起工业区

邮箱:williams@jiulin.com

Add:The North of No.329 Road,ZhangqiIndustry Zone,Ningbo,Zhejiang,China

E-Mail:veronicas@jiulin.comWeb:www.jiulin.com





PRODUCTION FACILITIES
生产设施



PRODUCTION FACILITIES
生产设施

多年来公司坚定不移地走吸取国际行业先进技术与自主开发相结合的道路，融贯零缺陷的过程质量控制，为提高和稳定公司的品质提供了可靠的基础，当前公司拥有国际上先进的轴承生产设备和成熟的加工工艺，采用了真空热处理淬火，全自动精密磨床生产线、全自动装球合套仪和洁洗、烘干，加脂、压盖整套生产流水线。

Over the years, the company has steadfastly taken the road of absorbing advanced technology in the international industry and combining independent development, integrating zero defect process quality control, providing a reliable basis for improving and stabilizing the quality of the company. At present, the company has internationally advanced bearing production equipment and mature processing technology, using vacuum heat treatment and quenching. Automatic precision grinding machine production line, automatic ball filling and sleeve instrument and cleaning, drying, grease, capping complete production line.





R&D TESTING

研发检测

上诺精密轴承致力于产品研究和开发，通过不断提升技术和制造，实现产品应用于长寿命、耐高温、高转速、低噪音的领域。

检测中心配备各种现代化测量设备，用于分析、评估、检测轴承。保证上诺精密轴承产品的质量稳定性。


Shangnuo Precision Bearing is committed to product research and development, through continuous improvement of technology and manufacturing, to achieve the application of products in the field of long life, high temperature resistance, high speed and low noise. The testing center is equipped with a variety of modern measuring equipment for analyzing, evaluating and inspecting bearings. Ensure the quality and stability of Shangnuo Precision Bearing products.




MANUFACTURING PROCESS

制造流程


外圈/Outer ring

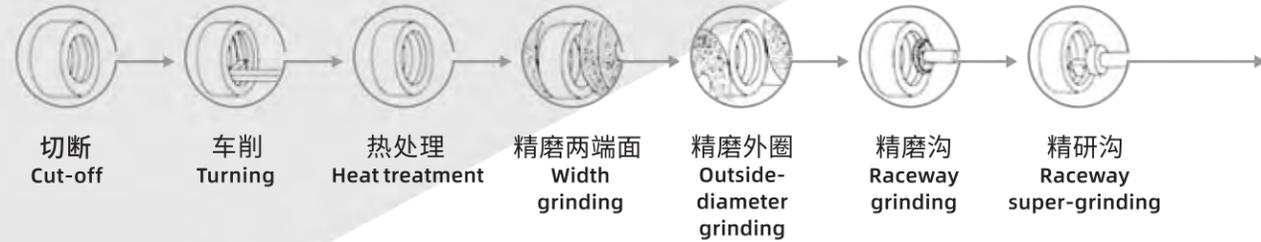


内圈/Inner ring

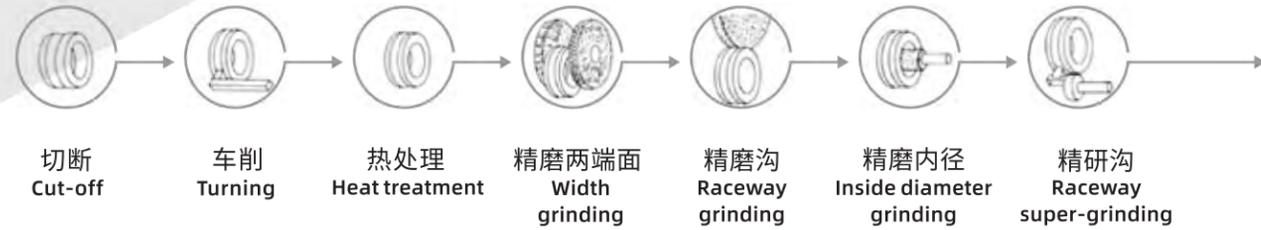


钢球/Steel ball

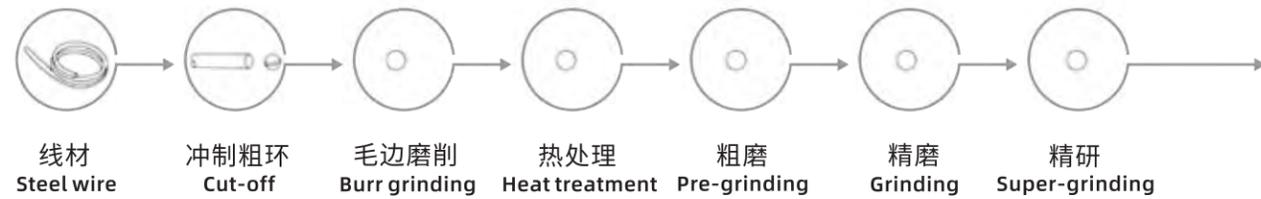

保持架/Cage

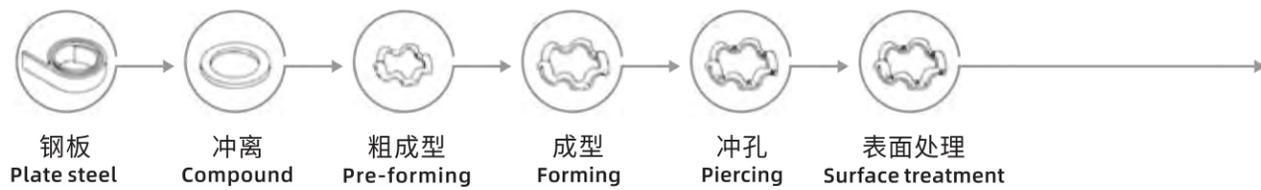

装配/Assembly

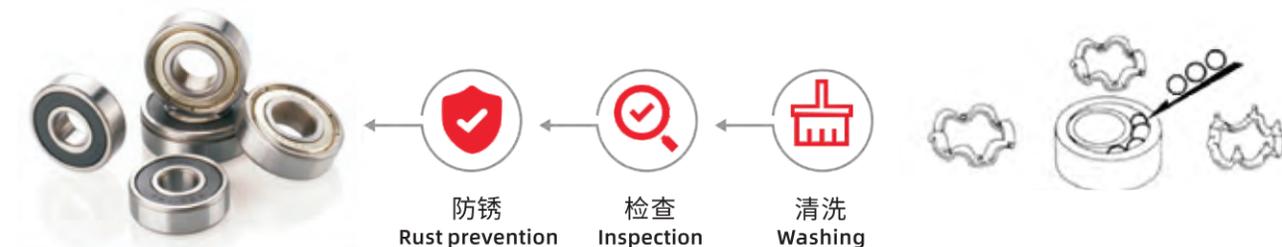

BEARING ACCURACY

轴承精度

滚动轴承主要尺寸的公差、公差值及旋转精度，在国家标准GB/T307.1中有规定。这些公差和ISO、JIS标准对照如下：

There are stipulations to the roller bearing major size tolerance, admittance valure, rotating precision in the National standard of GB/T307.1. The following is acomparison table between these tolerance and ISO、JIS standards

标准公差等级/Standard allowable tolerance grades

GB\T307.1	P0	P6	P5	P4	P2
ISO 492	Normal class	Class 6	Class 5	Class 4	Class 2
JIS B 1514	JIS 0级	JIS 6级	JIS 5级	JIS 4级	JIS 2级
AFBMA STD.20	ABEC-1	ABEC-3	ABEC-5	ABEC-7	ABEC-9

内圈成品/ Inner ring tolerances(finished product)

Tolerance unit: μm

公差等级 Tolerances Class	d mm		Δdmp		Δds		Vdsp				Vdmp	Kia	SD	Sia	ΔBS		VBS				
							直径系列 Diameter series			最大 max								最大 max	上偏差 max	下偏差 min	最大 max
							9	0、1	2、3、4												
P0 (ABEC-1)	超过 Exceed	到 to	上偏差 max	下偏差 min	上偏差 max	下偏差 min	最大 max			最大 max			上偏差 max	下偏差 min	最大 max						
	0.6	2.5	0	-8	/	/	10	8	6	6	10	/	/	0	-40	12					
	2.5	10		-8	/	/	10	8	6	6	10	/	/		-120	15					
	10	18		-8	/	/	10	8	6	6	10	/	/		-120	20					
	18	30		-10	/	/	13	10	8	8	13	/	/		-120	20					
	30	50		-12	/	/	15	12	9	9	15	/	/		-120	20					
50	80	-15		/	/	19	19	11	11	20	/	/	-150		25						
P6 (ABEC-3)	0.6	2.5	0	-7	/	/	9	7	5	5	5	/	/	0	-40	12					
	2.5	10		-7	/	/	9	7	5	5	6	/	/		-120	15					
	10	18		-7	/	/	9	7	5	5	7	/	/		-120	20					
	18	30		-8	/	/	10	8	6	6	8	/	/		-120	20					
	30	50		-10	/	/	13	10	8	8	10	/	/		-120	20					
	50	80		-12	/	/	15	15	9	9	10	/	/		-150	25					
P5 (ABEC-5)	0.6	2.5	0	-5	/	/	5	4	3	4	7	7	0	-40	5						
	2.5	10		-5	/	/	5	4	3	4	7	7		-40	5						
	10	18		-5	/	/	5	4	3	4	7	7		-80	5						
	18	30		-6	/	/	6	5	3	4	8	8		-120	5						
	30	50		-8	/	/	8	6	4	5	8	8		-120	5						
	50	80		-9	/	/	9	7	5	5	8	8		-150	6						
P4 (ABEC-7)	0.6	2.5	0	-4	0	-4	4	3	2	2.5	3	3	0	-40	2.5						
	2.5	10		-4		4	3	2	2.5	3	3	-40		2.5							
	10	18		-4		4	3	2	2.5	3	3	-80		2.5							
	18	30		-5		5	4	2.5	3	4	4	-120		2.5							
	30	50		-6		6	5	3	4	4	4	-120		3							
	50	80		-7		7	5	3.5	4	5	5	-150		4							

外圈成品 / outer ring tolerances (finished product)

Tolerance unit: μm

公差等级 Tolerances Class	D mm		ΔDmp		ΔDs		VDsp				VDmp	Kea	SD	Sea	ΔCS		VCS
							开型 Open			闭型 Close							
							9	0、1	2、3、4	0、1、2 3、4							
	超过 Exceed	到 to	上偏差 max	下偏差 min	上偏差 max	下偏差 min	最大 max				最大 max				上偏差 max	下偏差 min	最大 max
P0 (ABEC-1)	2.5	6	0	-8	/	/	10	8	6	10	6	15	/	/	与同一轴承 内圈的 ΔBs 及 VBs 相同		
	6	18		-8	/	/	10	8	6	10	6	15	/	/			
	18	30		-9	/	/	12	9	7	12	7	15	/	/			
	30	50		-11	/	/	14	11	8	16	8	20	/	/			
	50	80		-13	/	/	16	13	10	20	10	25	/	/			
P6 (ABEC-3)	2.5	6	0	-7	/	/	9	7	5	9	5	8	/	/	与同一轴承 内圈的 ΔBs 及 VBs 相同		
	6	18		-7	/	/	9	7	5	9	5	8	/	/			
	18	30		-8	/	/	10	8	6	10	6	9	/	/			
	30	50		-9	/	/	11	9	7	13	7	10	/	/			
	50	80		-11	/	/	14	11	8	16	8	13	/	/			
P5 (ABEC-5)	2.5	6	0	-5	/	/	5	4		3	5	4	8	与同一轴承 内圈的 ΔBs 相同		5	
	6	18		-5	/	/	5	4		3	5	4	8				
	18	30		-6	/	/	6	5		3	6	4	8				
	30	50		-7	/	/	7	5		4	7	4	8				
	50	80		-9	/	/	9	7		5	8	4	10				
P4 (ABEC-7)	2.5	6	0	-4	0	-4	4	3		2	3	2	5	与同一轴承 内圈的 ΔBs 相同		2.5	
	6	18		-4		4	3		2	3	2	5					
	18	30		-5		5	4		2.5	4	2	5					
	30	50		-6		6	5		3	5	2	5					
	50	80		-7		7	5		3.5	5	2	5					
	80	120		-8		8	6		4	6	2.5	6					

小型球轴承 ($D \geq 9, d < 10$)、微型轴承 ($D < 9$) 的径向游隙。

Radial internal clearance of small ($D \geq 9, d < 10$) and miniature ($D < 9$) bearing

游隙代号 Clearance mark	MC1		MC2		MC3		MC4		MC5		MC6	
游隙	min	max										
	0	5	3	8	5	10	8	13	13	20	20	28

备注：标准游隙为MC3/Note:Standard clearance is MC3

电机轴承径向游隙 / Radial clearance of motor bearing

unit: μm

内径 Inner diameter d (mm)		游隙 Clearance CM	
超过 over	到 To	最大 Min.	最小 Min.
2.5	10	3	10
10	18	4	11
18	30	5	12
30	50	9	17
50	80	12	22

深沟球轴承的径向游隙 / Nominal bearing inner diameter

unit: μm

公称轴承内径 Nominal bearing inner diameter d (mm)		径 向 游 隙 Radial clearance									
		C2		CN(C0)		C3		C4		C5	
超过 Exceed	到 To	min	max	min	max	min	max	min	max	min	max
2.5	6	0	7	2	13	8	23	-	-	-	-
6	10	0	7	2	13	8	23	14	29	20	37
10	18	0	9	3	18	11	25	18	33	25	45
18	24	0	10	5	20	13	28	20	36	28	48
24	30	1	11	5	20	13	28	23	41	30	53
30	40	1	11	6	20	15	33	28	46	40	64
40	50	1	11	6	23	18	36	30	51	45	73
50	65	1	15	8	28	23	43	38	61	55	90
65	80	1	15	10	30	25	51	46	71	65	105
80	100	1	18	12	36	30	58	53	84	75	120



润滑油脂一览表 / GREASE DATA SHEET

制造厂 Manufacturer	牌号 Brand	增稠剂 Viscosity	基油 Base oil	锥入度 Cone Penetration	使用温度范围 Operating temperature range °C	选用原则 Selection criteria
Klueber	Staburags NBU12	钡基 (Barium)	矿物 (Mineral)	245~275	-15~+140	常温脂 normal temperature grease
	Isoflex NBU15	钡基 (Barium)	双酯-矿物 (Diester Mineral)	265~295	-40~+130	常温脂 normal temperature grease
	Asonic GLY32	锂基 (Lithium)	合成油 (Synthetic oil)	265~295	-50~+140	低温脂 Low-temperature grease
	Asonic GLY72	Polyhamstoff	酯类合成油 (Ester Synthetic oil)	250~280	-40~+180	高温低噪音 high temperature low noise
	Barrierta L55/2	聚四氟乙烯 (PTFE)	氟化油 (Fluinated)	265~295	-40~+260	高、低温 high-low temperature grease
	Kluberquiet BQH72-102	聚脲 (Polyurea)	酯 (Ester)	250~280	-40~+180	高、低温和低噪音脂 high-low temperature and low noise grease
	Asonic HQ72-102	聚脲 (Polyurea)	酯 (Ester)	250~280	-40~+180	高、低温和低噪音脂 high-low temperature and low noise grease
	Petamo GHY133	聚脲 (Polyurea)	合成矿油 (Synthetic Mineral oil)	250~280	-25~+150	常温脂 normal temperature grease
	ISOFLEX LDS 18 Special A	锂基 (Lithium)	酯-矿物 (Ester Mineral)	265~295	-50~+120	低温脂 Low-temperature grease
	ISOFLEX PDL 300A	锂基 (Lithium)	酯 (Ester)	280~320	-70~+110	低温脂 Low-temperature grease
Kyodo Yushi	Multemp SRL	锂基 (Lithium)	酯 (Ester)	250	-50~+150	低噪音脂 low noise grease
	Multemp Ps2	锂基 (Lithium)	双酯+合成烃 (Diester mineral oil)	275	-50~+130	低温脂 Low-temperature grease
	Multemp LT 2	锂基 (Lithium)	双酯 (Diester oil)	280	-60~+130	低温脂 Low-temperature grease
	Multemp SRH	锂基 (Lithium)	多元醇酯 (Polyolester)	250	-40~+150	低噪音脂 low noise grease
	Multemp SB-M	聚脲 (Polyurea)	合成烃油 (mineral oil)	220	-40~+200	高温高速脂 high temperature high speed grease
	Multemp ET-K	聚脲 (Polyurea)	聚苯醚+多元醇酯 (Polyphenylene ether Polyolester)	300	-40~+200	高温高速交流发电脂 high temperature high speed alternators grease
	RAREMAX SUPER N	聚脲 (Polyurea)	矿物-合成油 (Mineral Synthetic oil)	255	-40~+180	常温脂 normal temperature grease
Mobil	Mobil 28	膨润土 (Bentonite)	合成碳氢 (Synthetic hydrocarbon)	265~320	-54~+177	高、低温 high-low temperature grease
	Mobil XHP 222	锂基 (Lithium)	矿物 (Mineral)	280	-30~+140	常温脂 normal temperature grease
	Beacon 325	锂基 (Lithium)	双酯 (Diester)	285	-54~+120	低温脂 Low-temperature grease
	Polyrex EM	双聚脲 (Diurea)	矿物 (Mineral)	284	-40~+180	高温低噪音 high temperature low noise



制造厂 Manufacturer	牌号 Brand	增稠剂 Viscosity	基油 Base oil	锥入度 Cone Penetration	使用温度范围 Operating temperature range °C	选用原则 Selection criteria
Mobil	Polyrex Ep2	聚脲 (Urea)	矿物 (Mineral)	280	-40~+180	高温低噪音 high temperature low noise
	UNIREX N2	锂皂复合基 (Lithium)	矿物 (Mineral)	280	-40~+180	高温低噪音 high temperature low noise
	UNIREX N3	锂皂复合基 (Lithium)	矿物 (Mineral)	235	-40~+180	高温低噪音 high temperature low noise
Shell	Gadus S2 V100Q 2(RLQ2)	锂基 (Lithium)	矿物 (Mineral)	265~295	-30~+135	低噪音、高速脂 low noise, high speed grease
	Gadus S2 V100 2(RL2)	锂基 (Lithium)	矿物 (Mineral)	265~295	-25~+130	常温脂 normal temperature grease
	Gadus S2 V100 3(RL3)	锂基 (Lithium)	矿物 (Mineral)	220~250	-20~+130	常温脂 normal temperature grease
	Gadus S2 V220 2(EP2)	锂基 (Lithium)	矿物 (Mineral)	265~295	-20~+120	常温脂 normal temperature grease
	Aero shell No.7	Microgel	矿物 (Mineral)	288	-73~+149	低温脂 Low-temperature grease
	Dow Corning	Molykote 33M	锂基 (Lithium)	硅油 (Silicone)	280	-73~+204
Molykote 44M		锂基 (Lithium)	硅油 (Silicone)	240~280	-40~+200	高温脂 high temperature grease
Chevron	Chevron SRI-2	聚脲 (Urea)	矿物 (Mineral)	280	-30~+177	高温脂 high temperature grease
Sinopec Lubricant	Hangu2	锂基 (Lithium)	矿物 (Mineral)	280	-10~+130	低噪音脂 low noise grease
CHL	WF1#	锂基 (Lithium)	矿物+合成油 (Mineral+Synthetic oil)	265	-30~+130	低噪音 low noise
	WF2#	聚脲 (Diurea)	矿物+合成油 (Mineral+Synthetic oil)	235	-40~+180	高温高速 high temperature high speed
	WF3#	聚脲 (Diurea)	合成油 (Synthetic oil)	235	-45~+180	高温低噪音 high temperature low noise
SUMICO	NR430	锂基 (Lithium)	酯 (Ester)	250	-50~+150	低噪音脂 low noise grease
	NR450	锂基 (Lithium)	酯 (Ester)	231	-50~+150	低噪音脂 low noise grease
	NR460	锂基 (Lithium)	酯+醚类 (Ester+Ethers)	233	-40~+160	低噪音脂 low noise grease
Others	SBR	锂基 (Lithium)	矿物 (Mineral)	265	-30~+130	低噪音脂 low noise grease
	342X	锂皂 (Li-soap)	矿物油+合成烃 (Mineral+Pao)	265	-40~+130	低噪音脂 low noise grease
	TURMOGREASE N 1502	聚脲 (Diurea)	酯油+合成烃 (Ester+Pao)	265~295	-50~+160	高温脂 high temperature grease
	DUS	聚脲 (Diurea)	矿物+合成油 (Mineral+Synthetic oil)	245	-40~+180	高温低噪音 high temperature low noise
	SUK	聚脲 (Diurea)	合成油 (Synthetic oil)	245	-45~+180	高温低噪音 high temperature low noise

60 系列轴承参数表 / 60 SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed			外形尺寸 (mm) Boundary dimensions				重量 Weight
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin	Open (kg)
					RS.2RS	Open.Z.ZZ						
604	604-zz	604-2RS	0.97	0.36	43000	48000	56000	4	12	4	0.2	0.0029
605	605-zz	605-2RS	1.33	0.55	38000	40000	50000	5	14	5	0.2	0.005
606	606-zz	606-2RS	1.51	0.74	34000	38000	45000	6	17	6	0.3	0.006
607	607-zz	607-2RS	2.22	0.91	32000	36000	43000	7	19	6	0.3	0.007
608	608-zz	608-2RS	3.32	1.38	28000	34000	40000	8	22	7	0.3	0.012
609	609-zz	609-2RS	3.35	1.40	24000	32000	34000	9	24	7	0.3	0.016
6000	6000-zz	6000-2RS	4.58	1.98	22000	31000	36000	10	26	8	0.3	0.019
6001	6001-zz	6001-2RS	5.10	2.38	18000	28000	32000	12	28	8	0.3	0.021
6002	6002-zz	6002-2RS	5.58	2.85	15000	24000	28000	15	32	9	0.3	0.026
6003	6003-zz	6003-2RS	6.00	3.25	13000	22000	26000	17	35	10	0.3	0.039
6004	6004-zz	6004-2RS	9.38	5.02	11000	18000	20000	20	42	12	0.6	0.069
6005	6005-zz	6005-2RS	10.06	5.67	9500	15000	18000	25	47	12	0.6	0.075
6006	6006-zz	6006-2RS	13.20	8.25	8000	13000	15000	30	55	13	1.0	0.09
6007	6007-zz	6007-2RS	16.20	10.30	6700	11000	13000	35	62	14	1.0	0.1
6008	6008-zz	6008-2RS	17.00	11.80	6000	10000	12000	40	68	15	1.0	0.19
6009	6009-zz	6009-2RS	21.00	14.80	5600	9000	11000	45	75	16	1.0	0.24
6010	6010-zz	6010-2RS	22.00	16.20	5000	8500	10000	50	80	16	1.0	0.26
60/22	60/22-zz	60/22-2RS	9.40	5.05	10000	13000	17000	22	44	12	0.6	0.074
60/28	60/28-zz	60/28-2RS	12.50	7.40	8400	10000	14000	28	52	12	0.6	0.096
60/32	60/32-zz	60/32-2RS	15.10	8.15	7200	8700	12000	32	58	13	1.0	0.122

62 系列轴承参数表 / 62 SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed			外形尺寸 (mm) Boundary dimensions				重量 Weight
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin	Open (kg)
					RS.2RS	Open.Z.ZZ						
624	624-zz	624-2RS	1.16	0.40	38000	40000	48000	4	13	5	0.2	0.003
625	625-zz	625-2RS	1.47	0.60	32000	36000	43000	5	16	5	0.3	0.005
626	626-zz	626-2RS	2.20	0.91	30000	32000	40000	6	19	6	0.3	0.008
627	627-zz	627-2RS	3.32	1.38	28000	30000	36000	7	22	7	0.3	0.014
628	628-zz	628-2RS	3.35	1.40	24000	28000	34000	8	24	8	0.3	0.016
629	629-zz	629-2RS	4.45	1.95	22000	28000	34000	9	26	8	0.3	0.02
6200	6200-zz	6200-2RS	5.10	2.38	18000	24000	30000	10	30	9	0.6	0.03
6201	6201-zz	6201-2RS	6.82	3.05	17000	22000	28000	12	32	10	0.6	0.036
6202	6202-zz	6202-2RS	7.65	3.75	14000	20000	24000	15	35	11	0.6	0.045
6203	6203-zz	6203-2RS	9.85	4.78	12000	17000	20000	17	40	12	0.6	0.065
6204	6204-zz	6204-2RS	12.84	6.20	11000	15000	18000	20	47	14	1.0	0.105
6205	6205-zz	6205-2RS	14.01	6.98	9000	13000	15000	25	52	15	1.0	0.125
6206	6206-zz	6206-2RS	19.50	11.30	7500	11000	13000	30	62	16	1.0	0.205
6207	6207-zz	6207-2RS	25.70	15.30	6300	9500	11000	35	72	17	1.1	0.284
6208	6208-zz	6208-2RS	29.51	18.14	5600	8500	10000	40	80	18	1.1	0.366
6209	6209-zz	6209-2RS	31.50	20.40	5300	7500	9000	45	85	19	1.1	0.42
6210	6210-zz	6210-2RS	35.00	23.20	4800	7100	8500	50	90	20	1.1	0.459
62/22	62/22-zz	62/22-2RS	12.90	6.65	9700	12000	14000	22	50	14	1.0	0.119
62/28	62/28-zz	62/28-2RS	17.90	9.75	8100	9700	12000	28	58	16	1.0	0.175
62/32	62/32-zz	62/32-2RS	20.70	11.60	7100	8400	11000	32	65	17	1.0	0.225

63 系列轴承参数表 / 63 SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed			外形尺寸 (mm) Boundary dimensions				重量 Weight
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin	Open (kg)
					RS.2RS	Open.Z.ZZ						
634	634-zz	634-2RS	0.73	0.67	32000	36000	43000	4	16	5	0.3	0.005
635	635-zz	635-2RS	2.28	1.08	30000	32000	40000	5	19	6	0.3	0.008
636	636-zz	636-2RS	3.30	1.37	28000	30000	36000	6	22	7	0.3	0.014
637	637-zz	637-2RS	4.55	1.95	22000	28000	34000	7	26	9	0.3	0.025
638	638-zz	638-2RS	4.55	1.95	22000	28000	34000	8	28	9	0.3	0.029
639	639-zz	639-2RS	5.10	2.38	20000	24000	30000	9	28	10	0.6	0.036
6300	6300-zz	6300-2RS	7.65	3.48	17000	22000	26000	10	35	11	0.6	0.049
6301	6301-zz	6301-2RS	9.72	4.23	16000	20000	24000	12	37	12	1.0	0.059
6302	6302-zz	6302-2RS	11.50	5.42	13000	17000	20000	15	42	13	1.0	0.082
6303	6303-zz	6303-2RS	13.56	6.56	11000	15000	18000	17	47	14	1.0	0.109
6304	6304-zz	6304-2RS	15.93	7.81	10000	14000	17000	20	52	15	1.1	0.142
6305	6305-zz	6305-2RS	22.40	11.50	8000	11000	13000	25	62	17	1.1	0.229
6306	6306-zz	6306-2RS	26.70	15.00	6700	9500	12000	30	72	19	1.1	0.34
6307	6307-zz	6307-2RS	33.50	19.20	6000	8500	10000	35	80	21	1.5	0.464
6308	6308-zz	6308-2RS	40.50	24.00	5300	7500	9000	40	90	23	1.5	0.636
6309	6309-zz	6309-2RS	53.00	32.00	4800	6700	8000	45	100	25	1.5	0.829
6310	6310-zz	6310-2RS	62.00	38.50	4300	6000	7500	50	110	27	2.0	1.06
63/22	63/22-zz	63/22-2RS	18.40	9.25	9200	11000	13000	22	56	16	1.1	0.179
63/28	63/28-zz	63/28-2RS	26.70	14.00	7400	8900	11000	28	68	18	1.1	0.287
63/32	63/32-zz	63/32-2RS	29.80	16.90	6500	7700	9500	32	75	20	1.1	0.389

67 系列轴承参数表 / 67 SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed			外形尺寸 (mm) Boundary dimensions				
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B		装配倒角 rmin
					RS.2RS	Open.Z.ZZ				open	zz.2RS	
6700	6700-ZZ	6700-2RS	572	304	-	-	-	10	15	3	4	0.1
6701	6701-ZZ	6701-2RS	935	527	-	-	-	12	18	4	4	0.2
6702	6702-ZZ	6702-2RS	870	499	-	-	-	15	21	4	4	0.2
6703	6703-ZZ	6703-2RS	930	640	-	-	-	17	23	4	4	0.2
6704	6704-ZZ	6704-2RS	1040	558	-	-	-	20	27	4	4	0.2
6705	6705-ZZ	6705-2RS	1090	840	-	-	-	25	32	4	4	0.2
6706	6706-ZZ	6706-2RS	1140	950	-	-	-	30	37	4	4	0.2
6707	6707-ZZ	6707-2RS	1850	1630	-	-	-	35	44	5	5	0.3
6708	6708-ZZ	6708-2RS	2510	2230	-	-	-	40	50	6	6	0.3
6709	6709-ZZ	6709-2RS	2570	2400	-	-	-	45	55	6	6	0.3
6710	6710-ZZ	6710-2RS	2660	2630	-	-	-	50	62	6	6	0.3

68 系列轴承参数表 / 68 SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed			外形尺寸 (mm) Boundary dimensions				重量 Weight
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin	Open (kg)
					RS.2RS	Open.Z.ZZ						
685	685-zz	685-2RS	0.715	0.281	40000	45000	53000	5	11	3/5	0.15	0.0019
686	686-zz	686-2RS	1.08	0.44	38000	40000	50000	6	13	3.5/5	0.15	0.0026
687	687-zz	687-2RS	1.17	0.51	34000	40000	45000	7	14	3.5/5	0.15	0.0029
688	688-zz	688-2RS	1.33	0.65	28000	36000	43000	8	16	4/5	0.2	0.004
689	689-zz	689-2RS	1.60	0.73	24000	36000	43000	9	17	4/5	0.2	0.0044
61800	61800-zz	61800-2RS	1.60	0.75	22000	34000	40000	10	19	5	0.3	0.005
61801	61801-zz	61801-2RS	1.92	1.04	20000	32000	38000	12	21	5	0.3	0.007
61802	61802-zz	61802-2RS	2.07	1.18	17000	28000	34000	15	24	5	0.3	0.008
61803	61803-zz	61803-2RS	2.18	1.28	15000	26000	30000	17	26	5	0.3	0.008
61804	61804-zz	61804-2RS	3.45	2.25	13000	22000	26000	20	32	7	0.3	0.02
61805	61805-zz	61805-2RS	3.70	2.65	10000	18000	22000	25	37	7	0.3	0.022
61806	61806-zz	61806-2RS	4.04	3.14	9000	15000	18000	30	42	7	0.3	0.026
61807	61807-zz	61807-2RS	4.27	3.59	7500	14000	16000	35	47	7	0.3	0.03
61808	61808-zz	61808-2RS	6.35	5.55	6700	12000	14000	40	52	7	0.3	0.034
61809	61809-zz	61809-2RS	6.57	5.88	6000	11000	13000	45	58	7	0.3	0.04
61810	61810-zz	61810-2RS	6.40	5.80	5300	9500	11000	50	65	7	0.3	0.057

69 系列轴承参数表 / 69 SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed			外形尺寸 (mm) Boundary dimensions				重量 Weight
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin	Open (kg)
					RS.2RS	Open.Z.ZZ						
693	693-zz	693-2RS	0.560	0.179	55000	60000	67000	3	8	3/4	0.15	0.00083
694	694-zz	694-2RS	0.960	0.345	43000	48000	56000	4	11	4	0.15	0.00175
695	695-zz	695-2RS	1.07	0.42	40000	43000	50000	5	13	4	0.2	0.0025
696	696-zz	696-2RS	1.47	0.60	34000	40000	45000	6	15	5	0.3	0.0043
697	697-zz	697-2RS	1.61	0.71	30000	36000	43000	7	17	5	0.3	0.0048
698	698-zz	698-2RS	2.22	0.91	30000	36000	43000	8	19	6	0.3	0.0068
699	699-zz	699-2RS	2.48	1.09	24000	34000	40000	9	20	6	0.3	0.0085
61900	61900-zz	61900-2RS	2.70	1.27	22000	32000	38000	10	22	6	0.3	0.011
61901	61901-zz	61901-2RS	2.89	1.46	20000	30000	36000	12	24	6	0.3	0.013
61902	61902-zz	61902-2RS	4.32	2.25	17000	26000	30000	15	28	7	0.3	0.016
61903	61903-zz	61903-2RS	4.58	2.56	15000	24000	28000	17	30	7	0.3	0.018
61904	61904-zz	61904-2RS	6.38	3.68	12000	19000	22000	20	37	9	0.3	0.036
61905	61905-zz	61905-2RS	6.65	4.20	10000	16000	19000	25	42	9	0.3	0.042
61906	61906-zz	61906-2RS	7.25	5.00	8500	14000	17000	30	47	9	0.3	0.049
61907	61907-zz	61907-2RS	8.00	5.67	7500	12000	15000	35	55	10	0.6	0.086
61908	61908-zz	61908-2RS	13.02	9.21	6300	11000	13000	40	62	12	0.6	0.112
61909	61909-zz	61909-2RS	14.10	10.90	5600	9500	12000	45	68	12	0.6	0.126
61910	61910-zz	61910-2RS	14.50	11.70	5300	9000	11000	50	72	12	0.6	0.135

6200 系列轴承参数表 / 6200 SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed			外形尺寸 (mm) Boundary dimensions			
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin
					RS.2RS	Open.Z.ZZ					
62000	62000-zz	62000-2RS	4.45	1.95	22000	30000	36000	10	26	10	0.3
62001	62001-zz	62001-2RS	5.10	2.38	18000	28000	32000	12	28	10	0.3
62200	62200-zz	62200-2RS	5.10	2.38	18000	24000	30000	10	30	14	0.6
62201	62201-zz	62201-2RS	6.82	3.05	17000	22000	28000	12	32	14	0.6
62202	62202-zz	62202-2RS	7.65	3.75	14000	20000	24000	15	35	14	0.6
62203	62203-zz	62203-2RS	9.58	4.78	12000	17000	20000	17	40	16	0.6
62204	62204-zz	62204-2RS	12.84	6.20	11000	15000	18000	20	47	18	1.0
62205	62205-zz	62205-2RS	14.01	6.98	9000	13000	15000	25	52	18	1.0
62206	62206-zz	62206-2RS	19.50	11.30	7500	11000	13000	30	62	20	1.0
62207	62207-zz	62207-2RS	25.70	15.30	6300	9500	11000	35	72	23	1.1
62208	62208-zz	62208-2RS	29.51	18.14	5600	8500	10000	40	80	23	1.1
62209	62209-zz	62209-2RS	31.50	20.40	5300	7500	9000	45	85	23	1.1
62210	62210-zz	62210-2RS	35.00	23.20	4800	7100	8500	50	90	23	1.1

16 系列轴承参数表 / 16 SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed			外形尺寸 (mm) Boundary dimensions			
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin
					RS.2RS	Open.Z.ZZ					
16100	16100-zz	16100-2RS	5.10	2.38	17000	24000	28000	10	28	8	0.3
16101	-	-	4.03	1.98	-	20000	26000	12	28	7	0.3
16002	-	-	5.58	2.85	-	19000	24000	15	32	8	0.3
16003	-	-	6.00	3.25	-	18000	22000	17	35	8	0.3
16004	-	-	6.34	3.76	-	16000	19000	20	42	8	0.6
16005	-	-	9.50	5.76	-	13000	17000	25	47	8	0.6
16006	-	-	9.94	6.55	-	11000	14000	30	55	9	1.0
16007	-	-	12.20	8.85	-	9500	12000	35	62	9	1.0
16008	-	-	12.60	9.65	-	9000	11000	40	68	9	1.0
16009	-	-	14.90	11.40	-	8500	10000	45	75	10	1.0
16010	-	-	15.40	12.40	-	8000	9500	50	80	10	1.0

R 系列轴承参数表 / R SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed		外形尺寸 (mm) Boundary dimensions			
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease	油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B (开式/闭式)	装配倒角 rmin
R2A	R2A-zz	R2A-2RS	0.64	0.23	56000	67000	3.175	12.7	3.969/4.366	0.15
R3	R3-zz	R3-2RS	1.07	0.42	43000	50000	4.762	12.7	3.969/4.978	0.15
R4	R4-zz	R4-2RS	1.47	0.60	38000	45000	6.35	15.875	4.978/4.978	0.3
R4A	R4A-zz	R4A-2RS	2.22	0.91	36000	43000	6.35	19.05	5.556/7.144	0.3
R6	R6-zz	R6-2RS	3.35	1.40	32000	38000	9.525	22.225	5.556/7.144	0.3
R8	R8-zz	R8-2RS	5.10	2.38	26000	32000	12.7	28.575	6.35/7.938	0.3
R10	R10-zz	R10-2RS	6.00	3.25	22000	26000	15.875	34.925	7.144/8.731	0.6
R12	R12-zz	R12-2RS	9.38	5.02	17000	19000	19.05	41.275	7.938/11.112	0.6
R14	R14-zz	R14-2RS	10.06	5.67	13000	17000	22.225	47.625	9.525/12.7	0.6
R16	R16-zz	R16-2RS	10.06	5.67	12000	16000	25.4	50.8	9.525/12.7	0.6

F 系列轴承参数表 / F SERIES

轴承型号 Bearing No.	内径 (d)	外径 (D)	法兰外径 (D1)		宽度 (B)		法兰宽度 (C)		基本额定 动负荷 Cr (N)	基本额定 静负荷 Cor (N)	极限转速 (rpm) Limiting Speed	
			open	ZZ2Rs	open	ZZ2Rs	open	ZZ2Rs			脂润滑 Grease	油润滑 Oil
F694zz	4	11	12.5		4	4	1	1	957	350	44000	49000
F604zz	4	12	13.5		4	4	1	1	957	350	41000	46000
F624zz	4	13	15		5	5	1	1	1301	488	39000	44000
F634zz	4	16	18		5	5	1	1	1340	523	33000	37000
F695zz	5	13	15		4	4	1	1	1077	432	37000	41000
F605zz	5	14	16		5	5	1	1	1329	507	35000	39000
F625zz	5	16	18		5	5	1	1	1729	675	31000	35000
F635zz	5	19	22		6	6	1.5	1.5	2336	896	28000	31000
F696zz	6	15	17		5	5	1.2	1.2	1340	523	31000	35000
F606zz	6	17	19		6	6	1.2	1.2	2263	846	29000	32000
F626zz	6	19	22		6	6	1.5	1.5	2336	896	26000	30000
Mf117zz	7	11	12.2		2.5	3	0.6	0.6	455	202	37000	41000
Mf137zz	7	13	14.2	14.6	3	4	0.6	0.8	541	276	33000	37000
F687zz	7	14	16		3.5	5	1	1.1	1173	513	31000	35000
F697zz	7	17	19		5	5	1.2	1.2	1605	719	28000	31000
F607zz	7	19	22		6	6	1.5	1.5	2336	896	25000	28000
F627zz	7	22	25		7	7	1.5	1.5	3287	1376	23000	26000
Mf128zz	8	12	13.2	13.6	2.5	3.5	0.6	0.8	543	274	33000	37000
Mf148zz	8	14	15.6		3.5	4	0.8	0.8	817	386	30000	34000
F688zz	8	16	22		4	5	1	1.1	1252	592	28000	31000
F698zz	8	19	25		6	6	1.5	1.5	2237	917	24000	27000
F608zz	8	22	22		7	7	1.5	1.5	3293	1379	22000	25000
F689zz	9	17	19		4	4	1	1.1	1327	668	25000	28000
F699zz	9	20	23		6	6	1.5	1.5	2467	1081	23000	26000
F609zz	9	24	27		7	7	1.5	1.5	3350	1400	20000	22000
F6800zz	10	19	21		5	5	1	1	1700	800	23000	26000
F6900zz	10	22	25		6	6	1.5	1.5	2611	1223	21000	23000
F6000zz	10	26	28		8	8	2	2	4580	1980	20000	28000
F6801zz	12	21	28		5	5	0.8	1	1911	1041	20000	22000
F6901zz	12	24	26.5		6	6	1	1.5	2831	1411	18000	21000

MR 系列轴承参数表 / MR SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed		外形尺寸 (mm) Boundary dimensions			
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease	油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B (开式/闭式)	装配倒角 rmin
MR104	MR104-zz	MR104-2RS	710	270	50000	60000	4	10	3/4	0.20
MR105	MR105-zz	MR105-2RS	430	168	50000	60000	5	10	3/4	0.15
MR115	MR115-zz	MR115-2RS	715	276	43000	50000	5	11	4/4	0.15
MR106	MR106-zz	MR106-2RS	495	218	45000	53000	6	10	2.5/3	0.15
MR126	MR126-zz	MR126-2RS	715	292	43000	50000	6	12	3/4	0.2
MR117	MR117-zz	MR117-2RS	455	201	43000	50000	7	11	2.5/3	0.15
MR137	MR137-zz	MR137-2RS	540	276	40000	48000	7	13	3/4	0.2
MR128	MR128-zz	MR128-2RS	545	274	40000	48000	8	12	2.5/3.5	0.15
MR148	MR148-zz	MR148-2RS	820	385	32000	43000	8	14	3.5/4	0.2
-	MR15267-zz	MR15267-2RS	3050	1660	26000	30000	15	26	7	0.3
-	MR15268-zz	MR15268-2RS	3050	1660	26000	30000	15	26	8	0.3
-	MR16267-zz	MR16267-2RS	2180	1280	24000	28000	16	26	7	0.3
-	MR15307-zz	MR15307-2RS	4300	2320	24000	28000	15	30	7	0.3
-	MR18307-zz	MR18307-2RS	4300	2320	24000	28000	18	30	7	0.2
-	MR16287-zz	MR16287-2RS	3200	1860	24000	28000	16	28	7	0.2
-	MR17287-zz	MR17287-2RS	3200	1860	24000	28000	17	28	7	0.2
-	MR2437-zz	MR2437-2RS	5200	3450	17000	20000	24	37	7	0.3
-	MR2237E-zz	MR2237E-2RS	6360	3710	12000	15000	24	37	外8/内11.5	0.3

深沟球轴承振动加速度级限值 / Vibration acceleration level limit of deep groove ball bearing

单个轴承振动加速度级 (dB) 不超过																
轴承公称外径 D (mm)		0直径系列					2直径系列					3直径系列				
>	≤	Z	Z1	Z2	Z3	Z4	Z	Z1	Z2	Z3	Z4	Z	Z1	Z2	Z3	Z4
10	15	36	33	30	27	24	36	33	30	27	24	41	37	33	29	25
15	20	37	34	31	28	25	37	34	31	28	25	42	38	34	30	26
20	25	38	35	32	29	26	40	37	33	29	26	43	39	33	31	27
25	30	39	36	33	30	27	41	38	34	30	27	44	40	36	31	27
30	40	41	38	35	32	29	42	39	36	33	30	46	42	38	33	29
40	50	43	40	37	34	31	44	41	38	35	32	48	44	40	35	31
50	60	45	42	39	36	33	46	43	40	37	34	50	46	42	37	33
60	70	48	45	42	38	35	49	46	42	39	36	52	48	44	39	35
70	80	50	47	44	40	37	51	48	44	41	38	54	50	46	41	37
80	90	52	49	46	42	39	53	50	46	43	40	57	53	48	43	39
90	100	54	51	48	44	41	55	52	48	45	42	59	55	50	45	41
100	110	56	53	50	46	43	58	54	50	47	44	61	57	52	47	43
110	120	58	55	52	48	45	60	56	52	49	46	63	59	54	49	45

深沟球轴承振动速度级限值 / Vibration speed level limit of deep groove ball bearings

轴承公称外径 D (mm)		V			V1			V2			V3			V4		
>	≤	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
mm		μm/s														
10	15	110	60	60	80	40	40	55	28	28	40	18	18	28	12	12
15	20	145	70	70	110	50	50	65	30	30	45	18	18	32	12	12
20	25	185	85	95	120	55	60	80	35	35	52	20	20	35	12	12
25	30	225	100	125	145	65	75	95	40	45	60	25	25	38	15	15
30	40	265	120	170	170	75	100	110	50	65	70	32	35	45	20	20
40	50	310	140	220	195	90	130	125	60	85	80	38	50	50	25	30
50	60	360	160	270	225	105	165	145	70	105	90	45	65	55	30	40
60	70	410	185	320	255	120	200	165	80	125	105	52	80	65	35	50
70	80	460	210	370	285	135	235	185	90	145	120	60	95	75	40	60
80	90	510	240	430	320	155	270	205	100	170	135	68	110	85	45	70
90	100	560	270	490	355	175	310	225	110	195	150	75	125	95	50	80
100	110	610	300	550	390	195	350	250	120	220	165	82	140	105	55	90
110	120	660	330	610	425	125	390	275	130	245	180	90	155	115	60	100







Stainless steel bearing Series 不锈钢轴承系列

STAINLESS STEEL
BEARING



- 1、出色的耐腐蚀性:**不锈钢轴承的耐腐蚀性是非常的好的,有着极强的耐腐蚀性,它不容易生锈的,是一个不错的产品。
- 2、能够水洗:**大家都了解很多的钢材类的物品在水洗以后都是会生锈的,但是不锈钢轴承能够水洗,并且在洗后能够不用再重新上润滑油。
- 3、能够在液体中运行:**基本上的材料都是避免在液体中使用的,因为在液体中使用久了,基本上的都是会发生腐蚀、生锈的情况。但是不锈钢轴承是能够在液体中使用的,因为不锈钢所使用的原材料是能够在液体中运行的。
- 4、卫生:**由于他的耐腐蚀性能好,所以不锈钢一直都能保持很干净的状态。
- 5、有很高的耐热能力:**它能够在比较高的温度范围内进行正常的运行工作,因为不锈钢轴承装有高温聚合物笼。
- 6、枯竭速度是较慢的:**不锈钢轴承在使用中并不需要油或者润滑油的保护,所以在速度和运载低的情况下是完全无需润滑的。

- 1. Excellent Corrosion Resistance:** Stainless steel bearings have excellent corrosion resistance and are extremely resistant to rust, making them a highly desirable product.
- 2. Washable:** Many steel items will rust after washing, but stainless steel bearings are washable and do not require relubrication.
- 3. Liquid-Suitable:** Most materials are generally avoided for use in liquids, as they will corrode and rust over time. However, stainless steel bearings can operate in liquids because the raw materials used in stainless steel are compatible with such conditions.
- 4. Hygienic:** Due to its excellent corrosion resistance, stainless steel can remain clean at all times.
- 5. High Heat Resistance:** Stainless steel bearings can operate normally in a relatively high temperature range because they are equipped with a high-temperature polymer cage.
- 6. Slow Drying:** Stainless steel bearings do not require oil or lubricant for protection, so they can be completely lubricated at low speeds and loads.